



Technical features

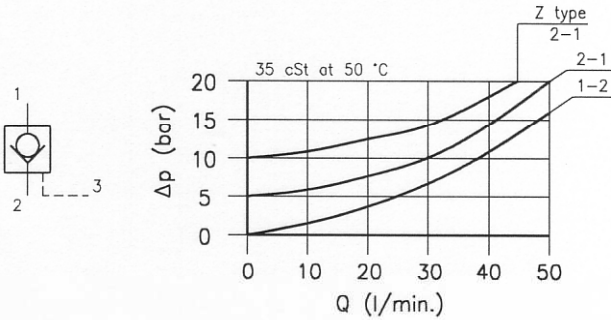

| | |
|---|-----------|
| Cavity (For dimensions see catalogue 17.000) | S 30/3 |
| Nominal flow (l/min.) | 40 |
| Max. pressure (bar) | 350 |
| Pilot ratio | 2.5:1 |
| Pilot volume (cm ³) | 0.10 |
| Fluid viscosity range (cSt) | 2.8 - 380 |
| Fluid temperature range (°C) | -20 +80 |
| Mass (kg) | 0.120 |
| Hydraulic fluid; mineral oil HM and HV | ISO 6074 |
| Recommended filtration; 19/15 ISO 4466 (25 μ absolutes) | |
| Standard seals in Polyurethane and Buna N | |


Dimensions

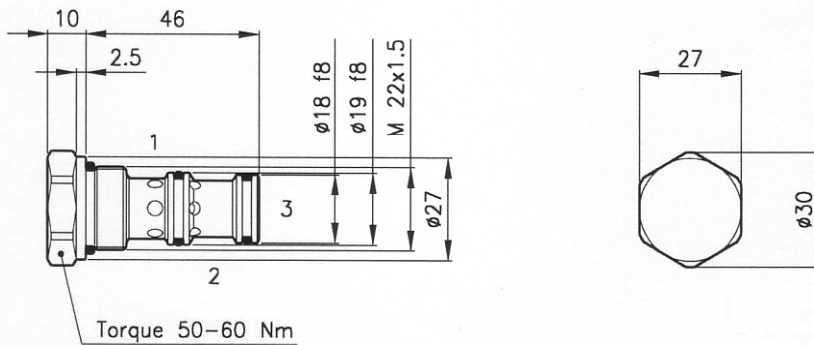

Ordering informations

CAP 30/M-S

CAP 30 = Valve type



Standard spring

M = 5 bar

Z = 10 bar

S = Without O-Ring on the pilot piston
(Omit in Standard version)

Codes:

CAP 30/M 32 011 104

CAP 30/M-S 32 011 105

CAP 30/Z 32 011 146

CAP 30/Z-S 32 011 155

External seals kit 90 620 104

CAP 30 valves can be assembled on standard bodies 30-C3 series; for dimensions see catalogue 16.010