

# 3" Ductile Iron Model SD-30-DI 3" Steel Model SD3-S1

Bulletin SS01007 Issue/Rev. 1.0 (9/17)

## Smith Meter® PD Meters

The **Smith Meter® Model SD-30-DI (Ductile Iron)** and **SD3-S1 (Steel) Meters** are 3", Class 150 ANSI, R.F. Flange, single-case, rotary vane, positive displacement meters. Applications include: blending, batching, dispensing, inventory control, and custody transfer of oils, solvents, chemicals, paints, fats, and fertilizers.



### Features

- **Superior Accuracy** – The Smith Meter® Rotary Vane Meter principle, combined with the meter's uniquely designed (offset) inlet and outlet nozzles, minimizes pressure drop across the measuring chamber, which reduces flow through meter clearances to maximize accuracy.
- **Low Pressure Drop** – Streamlined flow path provides low pressure drop.
- **Positive and Accurate Registration** – High torque drive calibrator with adjustment in 0.05% increments ensures accurate registration.
- **Long Service Life** – Low friction ball bearings, fixed cam-type timing, and rugged construction give sustained accuracy and long service life.

## Operating Specifications

### Maximum Flow Rate

	USGPM	L/min
<b>Continuous Rating – Standard Trim</b>	320	1,200
<b>Intermittent Rating<sup>1</sup> – Standard Trim</b>	400	1,500
<b>Continuous / Intermittent Rating – All Iron Trim</b>	240	900

## Options

- **High Viscosity Meter Clearances** – To extend operation at maximum flow rate from 400 mPa·s to 2,000 mPa·s.
- **High Temperature Clearances** – To extend operating temperatures from 150°F to 200°F (65°C to 93°C).
- **All Iron Trim** – For operating temperatures above 200°F (93°C).

### Minimum Flow Rate – Typical Performance

Linearity <sup>2</sup>	Units	Viscosity (Centipoise – mPa·s)					
		0.5	1	5	20	100	400
±0.15%	USGPM	50 <sup>3</sup>	30	12	3.0	0.60	0.15
	L/min	190 <sup>3</sup>	113	45	11.3	2.30	0.57
±0.25%	USGPM	40	22	9	2.2	0.45	0.11
	L/min	150	83	34	8.3	1.70	0.42
±0.50%	USGPM	25	15	6	1.5	0.30	0.08
	L/min	95	57	23	5.7	1.10	0.30

<sup>1</sup> Intermittent rating applies to service on clean, refined products where continuous operation is not required (e.g., truck loading, rail loading, and other loading or batching applications).

<sup>2</sup> Based on a maximum flow rate of 320 USGPM (1,200 L/min).

<sup>3</sup> Based on a maximum of 250 USGPM (950 L/min).

## Repeatability

±0.02%

## Viscosity

Standard: 400 mPa•s<sup>4</sup> (2,000 SSU) maximum.

Optional: 2 Pa•s (10,000 SSU) maximum – specify “High Viscosity Meter Clearances.”

Over 2 Pa•s – Specify “High Viscosity Meter Clearances” and derate maximum flow rate in direct proportion to viscosity over 2 Pa•s (e.g., at 4 Pa•s, derate maximum flow rate to 50% of normal continuous rating – 160 USGPM).

## Temperature

### Standard Meter Clearances with:

Buna:	-20°F to 150°F (-29°C to 65°C)
Viton:	10°F to 150°F (-12°C to 65°C)
PTFE <sup>8</sup> :	-20°F to 150°F (-29°C to 65°C)

### High Temperature Meter Clearances with:

Buna:	-20°F to 200°F (-29°C to 93°C)
Viton:	10°F to 200°F (-12°C to 93°C)
PTFE <sup>8</sup> :	-20°F to 200°F (-29°C to 93°C)

### High Temperature Meter Clearances with:

Buna:	-20°F to 200°F (-29°C to 93°C)
Viton:	10°F to 200°F (-12°C to 93°C)
PTFE <sup>8</sup> :	-20°F to 200°F (-29°C to 93°C)

For other temperatures, consult factory.

## Maximum Working Pressure

Standard: 150 psig (1,034 kPa) up to 200°F (93°C).

## Meter Gearing

5 U.S. Gallons or 1 Dekalitre per revolution of meter calibrator output shaft.

<sup>4</sup> 1,000 mPa•s = 1,000 cP = 1 Pa•s.


<sup>5</sup> For other than petroleum applications, consult factory.

<sup>6</sup> Specify: minimum/normal/maximum.

<sup>7</sup> Standard seals supplied unless optional material specified.

<sup>8</sup> Polytetrafluoroethylene (PTFE).

## Pressure Drop ( $\Delta P$ )

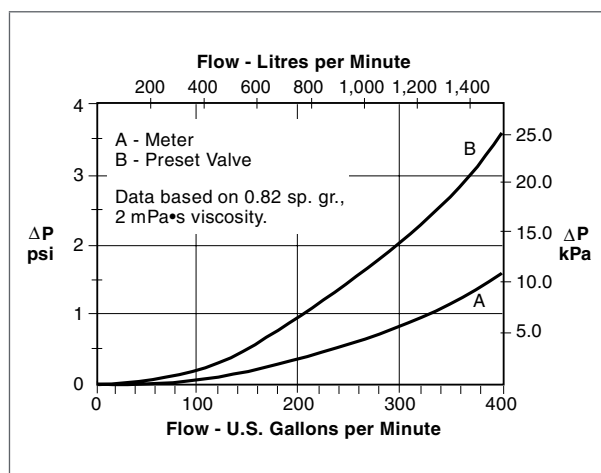

## Materials of Construction

Trim	Housing	Internals	Seals
Meter with Standard Trim	Ductile Iron or Steel	Iron, Steel, Stainless Steel, Aluminum	Loctite Master Gasket <sup>5</sup> and Packing
Meter All Iron Trim	Ductile Iron	Iron, Steel, Stainless Steel	Stand Std. – Buna Opt'l. – PTFE <sup>8</sup> and Viton
Set-Stop Valve Offset Type	Ductile Iron	Steel, Iron, Ni-Resist	Std. - Buna-N Opt'l. - Viton or PTFE <sup>8</sup>
Straight Through Type	Steel		

## Installation

It is recommended that the meter be protected with a 40 mesh strainer.

## Ordering Information

<b>Application</b>	Batching, Loading, Blending, Inventory, Process Control, etc.
<b>Operating Conditions</b>	Liquid – Name and sp. gr., Flow Range <sup>6</sup> , Temp. Range <sup>6</sup> , Viscosity Range <sup>6</sup> , Maximum Working Pressure
<b>Seals</b>	Packing Gland: Buna <sup>7</sup> Viton or PTFE <sup>8</sup> . Valve: Buna <sup>7</sup> , Viton, EPR, or PTFE <sup>8</sup> .
<b>Units of Registration</b>	Gallons, Liters, Pounds, Kilograms.
<b>Direction of Flow</b>	Left-to-right flow (as viewed above) is standard and will be supplied unless right-to-left flow is specified.
<b>Options and Accessories</b>	As required.

## Accessories

### Strainer

3" Model S3-1-ST basket-type, 3" steel with Class 150 ANSI R.F. Flanges.

### Air Eliminator

Model AR3-1030-1, 3" Steel, Class 150 ANSI R.F. flanges.

### Mechanical Set-Stop Valves

3" offset-type, ductile iron, Class 150 ANSI R.F. flanges.

### Automatic Temperature Compensation

Model ATC – Factory-set for a given product.

Model ATG – Field-adjustable for different products,

### Counters

200 Series – Accumulative, nine-digit, non-reset type.

600 Series – Field-adjustable for different products.

### Printer

Seven-digit accumulative.

Optional six-digit zero start.

### Preset Counter

300C Series – 4-digit (five-digit optional) mechanical push-button preset with microswitch package for valve or pump control.

### Pulse Transmitters

Type E – SPDT Mercury Wetted Switch.

LNC Pulse Transmitter (adapts to 600 Series Counters).

Low-Resolution – 1 or 10 pulses<sup>9</sup>.

High-Resolution (HR) – 50 or 100 pulses<sup>9</sup>.

PST – Dual-channel, high-resolution, security pulse generator.

UPT – Universal Pulse Transmitter – High resolution dual pulse quadrature output in a weather-tight explosion-proof enclosure (up to 1,000 pulses/rev.).

### Flow Rate Indicator

Direct mount mechanical.

Remote electronic.

### Remote Registration

Electromechanical counters.

Electronic totalizers.


---

<sup>9</sup> Per revolution of LNC right-hand wheel.

# Dimensions\*

## Inches (Millimeters)

**Note:** Dimensions – inches to the nearest tenth (millimeters to the nearest whole mm), each independently dimensioned from respective engineering drawings.

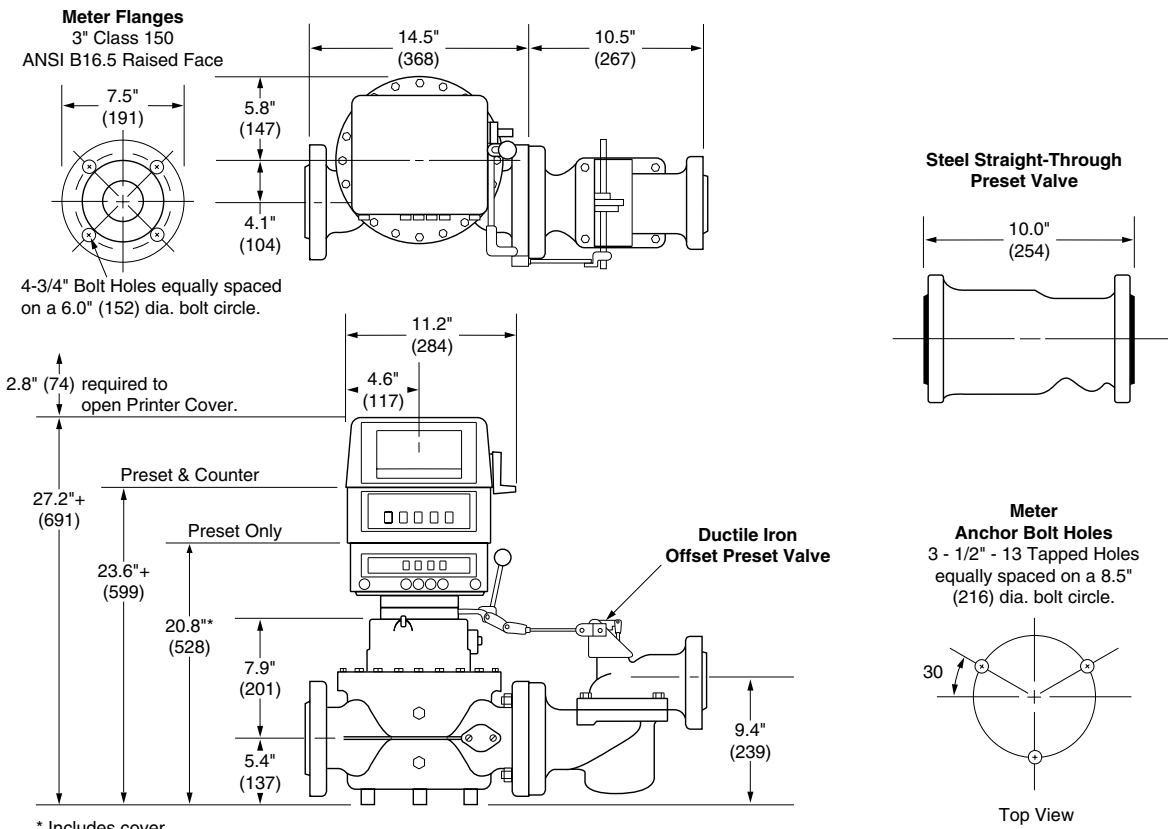

\* Includes cover.  
+Deduct 3.7" (94) if Preset Counter is not required.

	Lb	Kg
<b>Meter</b>	183	83
<b>Meter/LNC+</b>	198	90
<b>Preset Package+*</b>	259	117

+ Add 10 lb (4.5 kg) if ticket printer is required.  
+ Includes Meter, LNC, Preset counter and Valve.

The specifications contained herein are subject to change without notice and any user of said specifications should verify from the manufacturer that the specifications are currently in effect. Otherwise, the manufacturer assumes no responsibility for the use of specifications which may have been changed and are no longer in effect.

Contact information is subject to change. For the most current contact information, visit our website at [www.fmctechologies.com/measurementsolutions](http://www.fmctechologies.com/measurementsolutions) and click on the "Contact Us" link in the left-hand column.