

Bulb style "M"



Bulb style "F"

Bulb style "PK"
(Removable pocket)

CASING: in stainless steel, suitable for outdoor mounting
 PROTECTION DEGREE: IP 55
 STANDARD RANGE: -20....+120°C
 MAX POINTER: included with external reset screw
 PRECISION CLASS: ±2%
 ELECTRIC CONTACTS: two independent max contact, air insulated, normally open Max Load 18VA/10W
 BULB STYLE: to be indicated when issuing the order

Type	Dn	d1	d2	H	Bulb	Code
TESS-R-100-F	100	113	95	80	F	TE10SS1ROF
TESS-R-100-PK					PK	TE10SS1ROP
TESS-R-100-M					M	TE10SS1ROM

Performance of contacts	
DC	AC
24V / 200mA - DC	24V / 350mA - AC
110V / 80mA - DC	110V / 90mA - AC
240V / 40mA - DC	240V / 45mA - AC

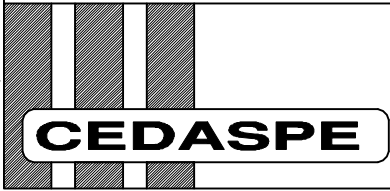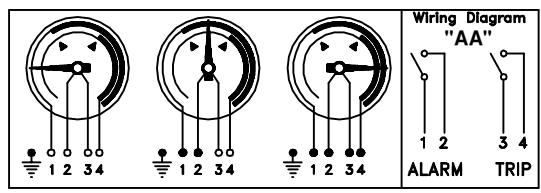

Titolo
Thermometers TESS series for DT
 - stainless steel housing
 - radial rigid stem

Data 11/03/13
 Scala ==
 Dis.
 Visto

Dis. Nr
3795
 1 2 3