


*50-inch range model, dimensions may differ for other ranges

Based on Celesco's original string pot design dating back to the late 1960's, the PT101 has become a standard throughout the years for literally thousands of applications including aircraft structural testing, hydraulic cylinder control, valve stem opening, and factory automation.

Available in full stroke ranges up to 100-inches, the PT101 provides a voltage feedback signal linearly proportional to the position of its traveling stainless steel measuring cable. Additionally the PT101 installs in minutes and doesn't require perfect parallel alignment. Simply secure the base to a fixed surface and attach the measuring cable to your moving object.

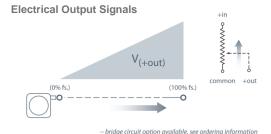

PT101

Cable Actuated Sensor Instrument Grade • Voltage Divider

Absolute Linear Position • Classic Stringpot Design Stroke Range Options: 0-2 to 0-100 inches

Powder Painted & Anodized Aluminum Enclosure Industrial Automation & Testing Applications

General

Full Stroke Range

0-2 to 0-100 inches

Options

Output Signal Options voltage divider (potentiometer)

Accuracy ± 0.25% - ± 0.10% full stroke (see ordering information)

Repeatability ± 0.02% full stroke Resolution essentially infinite

Measuring Cable .019-inch dia. nylon-coated stainless steel rope **Enclosure Material** powder-painted and anodized aluminum

Sensor plastic-hybrid precision potentiometer

Potentiometer Cycle

see ordering information

Maximum Retraction

see ordering information

Acceleration

Weight 2 lbs. max.

Electrical

Input Resistance

500, 1K, 5K, 10K or bridge

Options

Maximum Input Voltage see ordering information **Power Rating** see ordering information **Output Signal Change** 94% ±4% of input voltage

Over Full Stroke Range

Environmental


Enclosure IP50, NEMA 1 Temperature Coefficient 88 PPM/°F


of Sensing Element

Humidity 100% RH @ 90°F (32° C) Operating Temperature -40° to 200°F (-40° to 90°C) Vibration up to 10 g to 2000 Hz maximum

SENSOR SOLUTIONS /// PT101 12//2015 Page 1

Fig. 1 - Top Exit

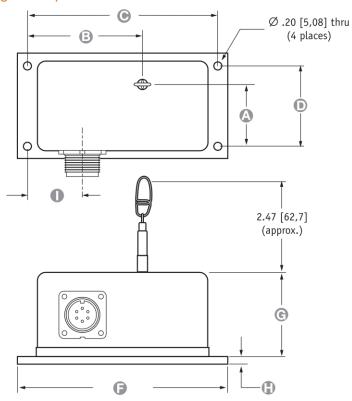

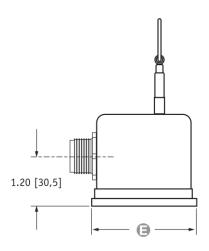


ALL DIMENSIONS ARE IN INCHES [MM] • tolerances are ±0.02 in. [±0,5mm]

| Range | A | ₿ | G | D | 3 | G | G | • | 0 |
|--------------|-------------|-------------|--------------|-------------|--------------|--------------|-------------|-----------|-------------|
| 2", 10", 20" | 1.34 [34,0] | 2.88 [73,1] | 4.75 [120,6] | 2.00 [50,8] | 2.63 [66,8] | 5.25 [133,4] | 2.10 [53,3] | .16 [4,1] | 1.37 [34,8] |
| 5", 25", 50" | 1.83 [46,5] | 2.88 [73,1] | 4.75 [120,6] | 2.00 [50,8] | 2.63 [66,8] | 5.25 [133,4] | 2.10 [53,3] | .16 [4,1] | 1.37 [34,8] |
| 15", 30" | 1.56 [39,6] | 2.88 [73,1] | 4.75 [120,6] | 2.00 [50,8] | 2.63 [66,8] | 5.25 [133,4] | 2.10 [53,3] | .16 [4,1] | 1.37 [34,8] |
| 40″ | 1.64 [41,6] | 2.88 [73,1] | 4.75 [120,6] | 2.00 [50,8] | 2.63 [66,8] | 5.25 [133,4] | 2.10 [53,3] | .16 [4,1] | 1.37 [34,8] |
| 60″ | 2.16 [54,9] | 2.88 [73,1] | 6.75 [171,4] | 2.37 [60,2] | 3.25 [82,5] | 7.50 [190,5] | 2.60 [66,0] | .19 [4,8] | 1.37 [34,8] |
| 75" | 2.45 [62,2] | 2.38 [60,4] | 6.75 [171,4] | 2.50 [63,5] | 3.63 [92,2] | 7.50 [190,5] | 2.86 [72,6] | .19 [4,8] | 1.37 [34,8] |
| 100″ | 3.10 [78,7] | 2.47 [62,8] | 7.38 [187,5] | 3.00 [76,2] | 4.25 [108,0] | 8.00 [203,2] | 3.79 [96,3] | .19 [4,8] | 3.69 [93,7] |

Ordering Information

Model Number:



Sample Model Number:

PT101 - 0025 - 111 - 1110

range:
measuring cable tension:
cable exit:
sensing circuit:
electrical connection: 25 inches standard - 5 oz. top 500 ohms

6-pin plastic connector

Full Stroke Range:


| order code: | 0002 | 0005 | 0010 | 0015 | 0020 | 0025 | 0030 | 0040 | 0050 | 0060 | 0075 | 0100 |
|----------------------------|-------|-------|--------|-----------------|-----------------------|---------------------|--------|--------|--------|-------------------|--------|---------|
| full stroke range, min: | 2 in. | 5 in. | 10 in. | 15 in. | 20 in. | 25 in. | 30 in. | 40 in. | 50 in. | 60 in. | 75 in. | 100 in. |
| accuracy (% of f.s.): | 0.25% | | 0.15% | | 0.10% | 0.15% | 0.10% | | | | | |
| potentiometer cycle life*: | 2.5 x | 106 | 5 x | 10 ⁵ | 2.5 x 10 ⁵ | 5 x 10 ⁵ | • | | 2.5 x | : 10 ⁵ | | |

*-1 cycle is defined as the travel of the measuring cable from full retraction to full extension and back to full retraction


Measuring Cable Tension:


| ♠ order code: | | 1 | | | | Н | | | |
|-----------------------|---------------|--------------|------------------|---|---------------|---|------------------|--|--|
| | star | ndard tensio | on | | high tension | | | | |
| | tension, ±20% | | max acceleration | | tension, ±40% | | max acceleration | | |
| 2, 10, 20 inch range: | 12 oz. | • | 11 g | | 65 oz. | | 53 g | | |
| 5, 25, 50 inch range: | 5 oz. | | 2 g | | 26 oz. | | 11 g | | |
| 15, 30 inch range: | 8 oz. | 0 | 3 g | | 43 oz. | 0 | 23 g | | |
| 40 inch range: | 6 oz. | • | 4 g | | 33 oz. | | 16 g | | |
| 60 inch range: | 13 oz. | 0 | 4 g | | 22 oz. | 0 | 8 g | | |
| 75 inch range: | 10 oz. | • | 3 g | | 31 oz. | | 12 g | | |
| 100 inch range: | 13 oz. | • | 5 g | 1 | 52 oz. | | 20 g | | |

Measuring Cable Exit:

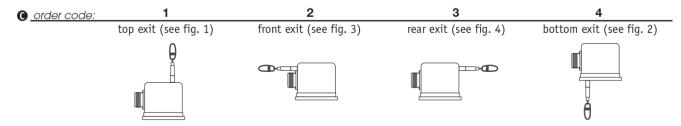


Sensing Circuit:









10-inch to 100-inch range 30 V AC/DC (2 W) 30 V AC/DC (2 W)








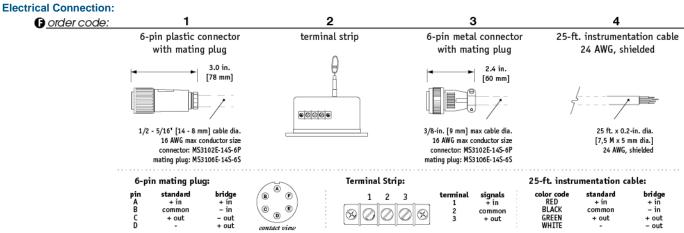



Fig. 2 - Bottom Exit

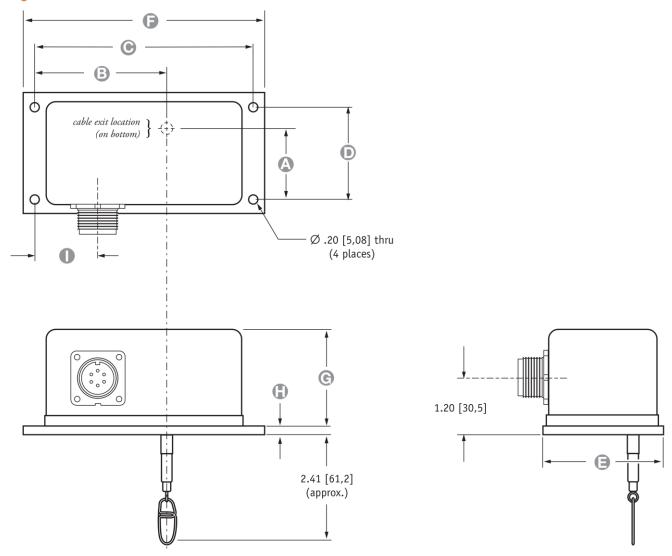

ALL DIMENSIONS ARE IN **INCHES [MM] •** tolerances are ± 0.02 in. $[\pm 0,5$ mm]

| Range | A | B | © | D | ⅎ | G | e | • | 0 | 0 |
|--------------|------------|------------|-------------|------------|-------------|-------------|------------|----------|------------|------------|
| 2", 10", 20" | 1.34[34,0] | 2.88[73,1] | 4.75[120,6] | 2.00[50,8] | 2.63[66,8] | 5.25[133,4] | 2.10[53,3] | .16[4,1] | 1.37[34,8] | 2.57[65,3] |
| 5", 25", 50" | 1.83[46,5] | 2.88[73,1] | 4.75[120,6] | 2.00[50,8] | 2.63[66,8] | 5.25[133,4] | 2.10[53,3] | .16[4,1] | 1.37[34,8] | 2.57[65,3] |
| 15", 30" | 1.56[39,6] | 2.88[73,1] | 4.75[120,6] | 2.00[50,8] | 2.63[66,8] | 5.25[133,4] | 2.10[53,3] | .16[4,1] | 1.37[34,8] | 2.57[65,3] |
| 40" | 1.64[41,6] | 2.88[73,1] | 4.75[120,6] | 2.00[50,8] | 2.63[66,8] | 5.25[133,4] | 2.10[53,3] | .16[4,1] | 1.37[34,8] | 2.57[65,3] |
| 60" | 2.16[54,9] | 2.88[73,1] | 6.75[171,4] | 2.37[60,2] | 3.25[82,5] | 7.50[190,5] | 2.60[66,0] | .19[4,8] | 1.37[34,8] | 2.63[66,8] |
| 75" | 2.45[62,2] | 2.38[60,4] | 6.75[171,4] | 2.50[63,5] | 3.63[92,2] | 7.50[190,5] | 2.86[72,6] | .19[4,8] | 1.37[34,8] | 2.69[68,3] |
| 100" | 3.10[78,7] | 2.47[62,8] | 7.38[187,5] | 3.00[76,2] | 4.25[108,0] | 8.00[203,2] | 3.79[96,3] | .19[4,8] | 3.69[93,7] | 2.90[73,7] |


Fig. 3 - Rear Exit

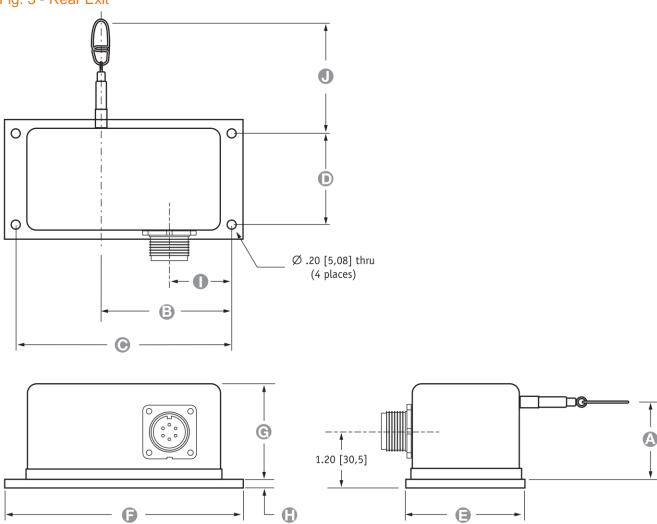

ALL DIMENSIONS ARE IN **INCHES [MM]** • tolerances are ± 0.02 in. $[\pm 0,5$ mm]

| Range | A | ₿ | © | (D) | (3 | G | G | • | 0 | 0 |
|--------------|------------|------------|-------------|------------|-------------|-------------|------------|----------|-------------|------------|
| 2", 10", 20" | 1.34[34,0] | 2.88[73,1] | 4.75[120,6] | 2.00[50,8] | 2.63[66,8] | 5.25[133,4] | 2.10[53,3] | .16[4,1] | 1.37[34,8] | 2.57[65,3] |
| 5", 25", 50" | 1.83[46,5] | 2.88[73,1] | 4.75[120,6] | 2.00[50,8] | 2.63[66,8] | 5.25[133,4] | 2.10[53,3] | .16[4,1] | 1.37[34,8] | 2.57[65,3] |
| 15", 30" | 1.56[39,6] | 2.88[73,1] | 4.75[120,6] | 2.00[50,8] | 2.63[66,8] | 5.25[133,4] | 2.10[53,3] | .16[4,1] | 1.37[34,8] | 2.57[65,3] |
| 40" | 1.64[41,6] | 2.88[73,1] | 4.75[120,6] | 2.00[50,8] | 2.63[66,8] | 5.25[133,4] | 2.10[53,3] | .16[4,1] | 1.37[34,8] | 2.57[65,3] |
| 60" | 2.16[54,9] | 2.88[73,1] | 6.75[171,4] | 2.37[60,2] | 3.25[82,5] | 7.50[190,5] | 2.60[66,0] | .19[4,8] | 5.38[136,7] | 2.63[66,8] |
| 75" | 2.45[62,2] | 2.38[60,4] | 6.75[171,4] | 2.50[63,5] | 3.63[92,2] | 7.50[190,5] | 2.86[72,6] | .19[4,8] | 5.38[136,7] | 2.69[68,3] |
| 100" | 3.10[78,7] | 2.47[62,8] | 7.38[187,5] | 3.00[76,2] | 4.25[108,0] | 8.00[203,2] | 3.79[96,3] | .19[4,8] | 3.69[93,7] | 2.90[73,7] |

Fig. 4 - Front Exit

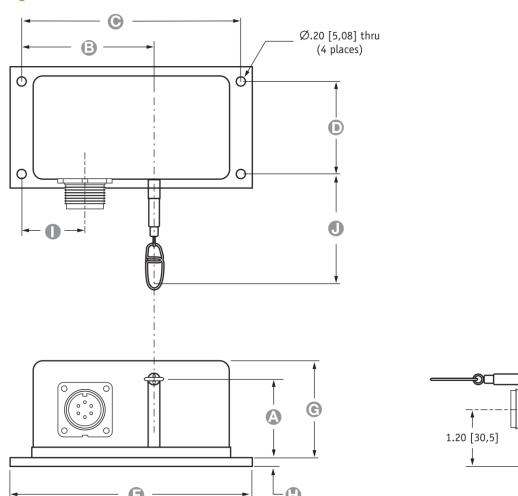

ALL DIMENSIONS ARE IN **INCHES [MM] •** tolerances are ± 0.02 in. $[\pm 0,5$ mm]

| Range | A | B | © | • | ⅎ | G | G | (1) | 0 | • |
|--------------|------------|------------|-------------|------------|-------------|-------------|------------|------------|------------|------------|
| 2", 10", 20" | 1.34[34,0] | 2.88[73,1] | 4.75[120,6] | 2.00[50,8] | 2.63[66,8] | 5.25[133,4] | 2.10[53,3] | .16[4,1] | 1.37[34,8] | 2.57[65,3] |
| 5", 25", 50" | 1.83[46,5] | 2.88[73,1] | 4.75[120,6] | 2.00[50,8] | 2.63[66,8] | 5.25[133,4] | 2.10[53,3] | .16[4,1] | 1.37[34,8] | 2.57[65,3] |
| 15", 30" | 1.56[39,6] | 2.88[73,1] | 4.75[120,6] | 2.00[50,8] | 2.63[66,8] | 5.25[133,4] | 2.10[53,3] | .16[4,1] | 1.37[34,8] | 2.57[65,3] |
| 40" | 1.64[41,6] | 2.88[73,1] | 4.75[120,6] | 2.00[50,8] | 2.63[66,8] | 5.25[133,4] | 2.10[53,3] | .16[4,1] | 1.37[34,8] | 2.57[65,3] |
| 60" | 2.16[54,9] | 2.88[73,1] | 6.75[171,4] | 2.37[60,2] | 3.25[82,5] | 7.50[190,5] | 2.60[66,0] | .19[4,8] | 1.37[34,8] | 2.63[66,8] |
| 75" | 2.45[62,2] | 2.38[60,4] | 6.75[171,4] | 2.50[63,5] | 3.63[92,2] | 7.50[190,5] | 2.86[72,6] | .19[4,8] | 1.37[34,8] | 2.69[68,3] |
| 100" | 3.10[78,7] | 2.47[62,8] | 7.38[187,5] | 3.00[76,2] | 4.25[108,0] | 8.00[203,2] | 3.79[96,3] | .19[4,8] | 3.69[93,7] | 2.90[73,7] |

NORTH AMERICA

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

PT101 12/01/2015