


## Instruction for ELTEX UPG Yarn break detector

16720-16730



#### General

The UPG is a small, general-purpose yarn break detector in a robust metal housing. It works on the piezoelectric principle, detecting the yarn movement.


The ceramic sensor part can be used as a closed eyelet or as an open bar.

The yarn motion is detected most effectively when the yarn deviates about  $10-15^{\circ}$  as it passes through the sensor.

When the UPG detects yarn movement, the green LED (light emitting diode) is on

Diese Anleitung ist auf Deutsch erhältlich, TH-0265. Queste istruzioni sono disponibili in italiano, TH-0266. Esta instrucción está disponible en español, TH-0267. www.eltex.se

# Fitting

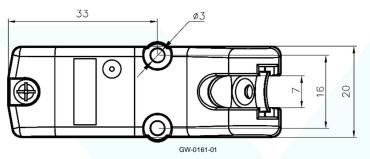

The UPG yarn break detector is fitted on the machine with two screws, maximum diameter 3 mm.

### Adjustment

If the factory setting of the sensitivity is not suitable, it can be adjusted with the potentiometer, located under the lid.

When making adjustments, use a small screw-driver, maximum size of 2.5 mm.

Minimum setting (*k* counter clockwise) is for course, fast moving and/or high-tension yarn.


**NOTE!** Electrical interference caused by insufficient machine ground can cause the UPG to indicate yarn movement when no yarn is moving.

This can be corrected by electrically insulating the UPG from the machine frame. Two nylon screws and an insulation pad can be used to achieve this. These parts are included with the UPG sensor. These parts can also be ordered from Eltex.

The part numbers are:

#4144 Nylon Screw, #6868 Insulation pad








## Connection

The detector has a 0,5 or 3,5 m cable with a 6P4C modular plug connector

The output is suitable for PLC or other electronic control devices. The detectors can be connected in parallel.

The detector is protected against reversed polarity on the power supply




Output: Optocoupler, NC = normally closed Output load: max 10 mA, 35 V DC Max ON-STATE voltage drop: 2V DC at 10 mA

Declaration of conformity according to the EMC Directive 89/336/EEC

The Eltex Yarn Break Detector UPG conforms to the standard


PNP

Configured as PNP output for PLC; high when yarn is not moving.



Configured as NPN open collector output (for input with pull-up resistor); low when yarn is not moving.

#### Special



Configured as optocoupler output; high when yarn is not moving.



EN 61326/A1 (1998)

[H-0263-10 Komp 7932 Copyright © Eltex of Sweden AB