




#50 BR3IS-QAJE-1.34  
 #51 BR5IS-QAJE-1.34  
 #52 BR10IL-QAJE-1.34  
 #53 BR15IL-QAJE-1.34



#54 BR10IS-QAJA.81  
 #55 BR10IL-QAJA.81  
 #56 BR15IS-QAJA.81



#57 BR5IS-QAHA.98

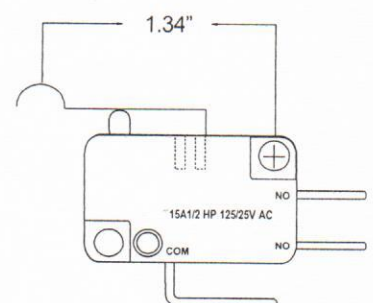

#58 BR10IS-QALE-1.34

Item #	Abs- Vabsco Part Number	Type	Current Rating	Max. Operating Force	Max. Pretravel	Operating Point	Min. Overtravel	Max. Diff. Movement	Actuator Length	Terminal Type
# 50	BR3IS-QAJE-1.34	SPDT	3 A @ 250V AC	35	.125	81±.05	.085	.030	1.34"	.187" *
# 51	BR3IS-QAJE-1.34	SPDT	3 A @ 250V AC	86	.125	81±.05	.085	.030	1.34"	.187" *
# 52	BR10IL-QAJE-1.34	SPDT	10 A @ 125/250V AC	37	.125	81±.05	.085	.030	1.34"	.187" *
# 53	BR15IL-QAJE-1.34	SPDT	15 A @ 125/250V AC	50	.125	81±.05	.085	.030	1.34"	.187" *
# 54	BR10IS-QAJA.81	SPDT	10 A @ 125/250V AC	285	.047	81±.03	.040	.010	.81"	.187" *
# 55	BR10IL-QAJA.81	SPDT	10 A @ 125/250V AC	75	.047	81±.03	.040	.010	.81"	.187" *
# 56	BR15IS-QAJA.81	SPDT	15 A @ 125/250V AC	400	.047	81±.03	.040	.010	.81"	.187" *
# 57	BR5IS-QAHA.98	SPDT	5 A @ 125/250V AC	100	.075	81±.04	.060	.014	.98"	.187" *
# 58	BR10IS-QALE-1.34	SPDT	15 A @ 125/250V AC	200	.125	81±.05	.085	.030	1.34"	.187" *