



# ***RC5185 & RC5195*** ***Low vibration hammers***



**RODCRAFT**  
Premium

***Low vibration***  
***& powerful***

**Quality**  
**Technology**  
**Service**

# RC5185 & RC5195

## LOW VIBRATION

- New composite vibration damped valve
- 8.2 m/s<sup>2</sup> for RC5185 and 11.9 for RC5195

## HIGH DURABILITY & LIGHTWEIGHT

- Aluminum housing & steel shaft

## POWERFUL

- 9 joules for RC5185 and 12 for RC5195

## HIGH EFFECTIVENESS

- Back part designed for great handling



## EASY TO OPERATE

- Quick change retainer for fast chisel changes (provided with the tool)

## RUGGED

- High resistance throttle & bushing valves teasing trigger

## COMFORT & INSULATION:

- Curved handle with TPR injection on the back part
- Rear exhaust



# Low vibration hammers

## Features

Model	Part number	BPM	Power	Shank Hex	Bore & Stroke	Dimensions	Weight	Air Cons @Load	Vibrations		Sound Pressure	Sound Power	Inner Hose Diameter	Air Inlet
		min-1	Joule	mm	mm	mm	kg	l/s	A	k	dB(A)	dB(A)	mm	
RC5185	895 100 0152	3.000	9	11	19x70	179x57x163	1.7	6.2	8.2	1.2	102	113	9.5	1/4
RC5195	895 100 0154	2.100	12	11	19x95	223x57x163	2.0	6.2	11.9	1.5	102	113	9.5	1/4



## Make your life easy:

- Choose a ready to use startup kit for metal working or concrete and stone jobs
- Protect and store your tool and accessories together in a handy high quality case




## Kit contents

Applications	Model	Part number	Description
Metal kit	RC5185K	895 100 0153	Case, hammer, quick chuck; Chisels: universal, de-riveting, spot weld, curve cutting
	RC5195K	895 100 0155	
Concrete / Stone kit	RC5185K	895 100 0208	Case, hammer, quick chuck; Chisels: pointed, flat 20 mm, flat 30 mm, flat 40 mm
	RC5195K	895 100 0209	

# RC5185 & RC5195

www.rodcraft.com

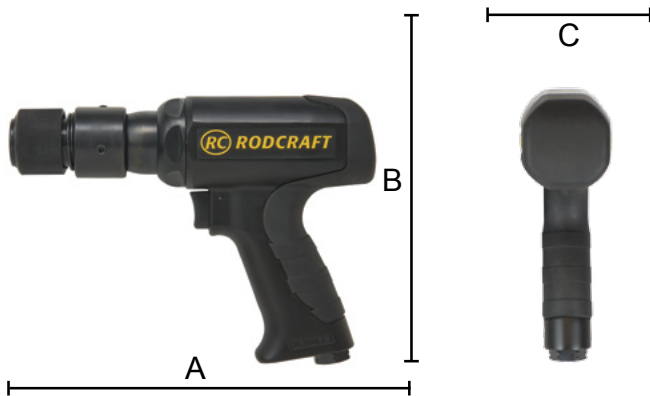

## Dimensions

Size	RC5185	RC5195
A	179 mm	223 mm
B	163 mm	163 mm
C	57 mm	57 mm

## Spares

Model	Description	Part number
RC5185	Tune-up kit	895 028 0061
RC5195	Tune-up kit	895 028 0061

## Accessories

### Chisels

Applications	Model	Part number	Description
Metal	RC20S	895 101 1927	Universal chisel - 135 x 19 mm
	RC22S	895 101 1928	De-rileting - 140 x 20 mm
	RC19S	895 101 1926	Spot weld chisel - 140 x 29 mm
	RC18S	895 101 1925	Curve cutting chisel 1mm thick - 140 mm
Concrete / Stone	SS10K	895 101 1933	Pointed chisel - 135 mm
	SS20K	895 101 1935	Flat chisel - 140 x 20 mm
	SS30K	895 101 1937	Flat chisel - 140 x 30 mm
	SS40K	895 101 1939	Flat chisel - 135 x 40 mm



### Quick chuck

Shank hex 11 mm

RC73	895 101 1960
------	--------------



### Safety Gloves

Split Fit Air Mechanic's Gloves - SFA

Model	Size	Part#
SFA-SM	SM / 8	895 101 1004
SFA-MD	MD / 8,5	895 101 1003
SFA-LG	LG / 9	895 101 1002
SFA-XL	XL / 9,5	895 101 1001
SFA-XXL	XXL / 10	895 101 1000



**Check out today our mobile ecatalog on [m.rodcraft.com](http://m.rodcraft.com)**